

Chubb safes


Combination Lock User Instruction

This 4 wheels combination lock is certified by UL. The standard code numbers from the factory are (10, 20, 30, 40). You can change code numbers to be the number you desire.

NOTE: Please read this instruction carefully before using your combination code.

1. Unlock the combination.

For first time use the combination code from the factory are (10, 20, 30, 40).

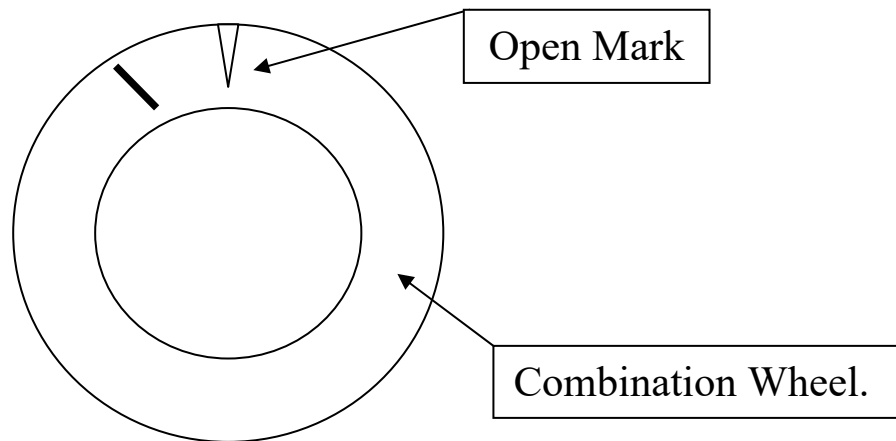


1. Set No. "0" to the **Open mark**.
2. Turn the combination wheel to the "**Right**" pass the **Open mark** 5 times, at the 5th time stop No. "10" exactly at the open mark.
3. Turn the combination wheel back to the "**Left**" pass the **Open mark** 4 times, at the 4th time stop No. "20" exactly at the open mark.
4. Turn the combination wheel back to the "**Right**" pass the **Open mark** 3 times, at the 3rd time stop No. "30" exactly at the open mark.
5. Turn the combination wheel back to the "**Left**" pass the **Open mark** 2 times, at the 2nd time stop No. "40" exactly at the open mark.
6. Turn the combination wheel back to the right until it lock around No. "95". Then unlock the key and turn safe handle to open position, now you can open the safe. At this stage if you can turn the combination wheel more than 3 times or the combination wheel doesn't lock that's mean you may make the wrong numbers of turn, just start it all over again from the 1st step.


Chubb safes

2. Change the combination code.



2.1 Clear Old Code: Before changing the combination code. You have to clear the old code. For first time use the old code is the factory code (10, 20, 30, 40). By open the safe door and turn safe handle to the lock position (the Bolt will come out). Then do the following steps:

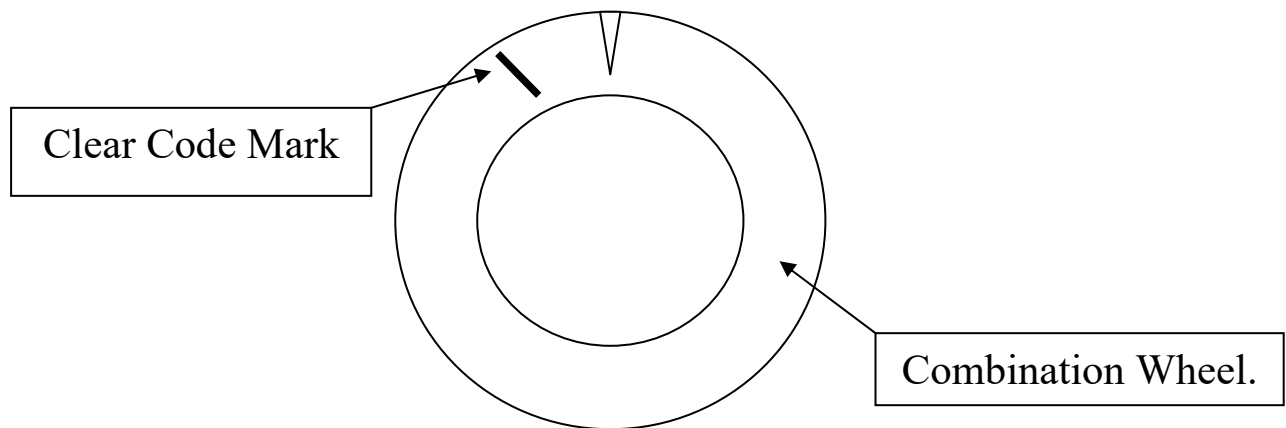

1. Set No. "0" to the **Clear Code mark**.
2. Turn the combination wheel to the **"Right"** pass the **Clear Code Mark** 5 times at the 5th time stop No. "10" exactly at the Clear Code Mark.
3. Turn the combination wheel back to the **"Left"** pass the **Clear Code Mark** 4 times at the 4th time stop No. "20" exactly at the Clear Code Mark.
4. Turn the combination wheel back to the **"Right"** pass the **Clear Code Mark** 3 times at the 3rd time stop No. "30" exactly at the Clear Code Mark.
5. Turn the combination wheel back to the **"Left"** pass the **Clear Code Mark** 2 times at the 2nd time stop No. "40" exactly at the Clear Code Mark and stop.
6. At the back of safe door. You will see a key whole. Insert Change key and turn it anti-clockwise.

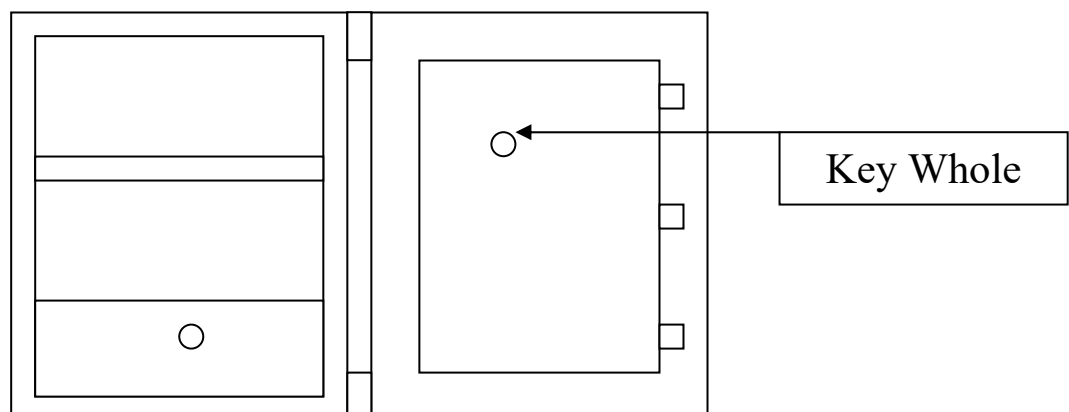

Chubb safes

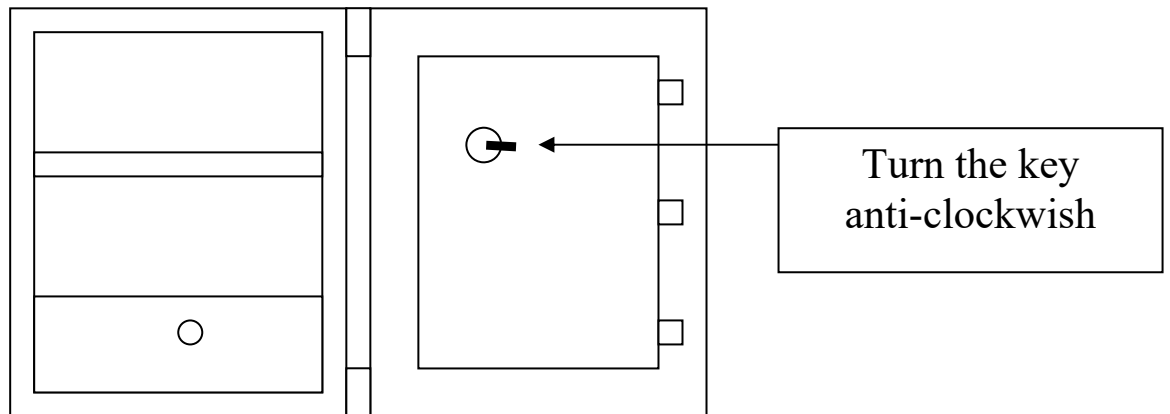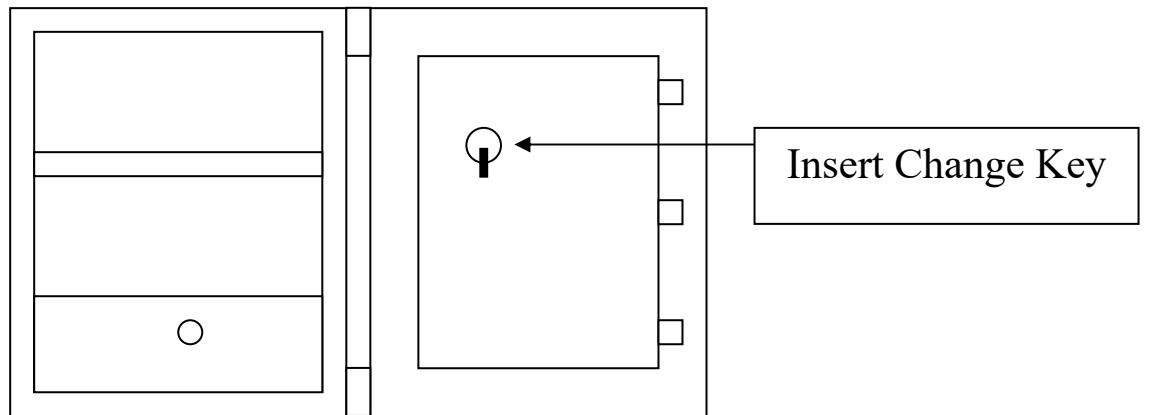

2.2 Set New Code: Use the same process as “Clear Old Code” but change the code number to be the number you desired. For example your desired number are “40”, “50”, “60”, “70”

1. Set No. “0” to the **Clear Code mark**.
2. Turn the combination wheel to the “**Right**” pass the **Clear Code Mark** 5 times at the 5th time stop No. “40” exactly at the Clear Code Mark.
3. Turn the combination wheel back to the “**Left**” pass the **Clear Code Mark** 4 times at the 4th time stop No. “50” exactly at the Clear Code Mark.
4. Turn the combination wheel back to the “**Right**” pass the **Clear Code Mark** 3 times at the 3rd time stop No. “60” exactly at the Clear Code Mark.
5. Turn the combination wheel back to the “**Left**” pass the **Clear Code Mark** 2 times at the 2nd time stop No. “70” exactly at the Clear Code Mark and stop.
6. When finished turn back the change key clockwise to the original position and pull it off. Then try to open the safe with your new code at the door open position for couples of time before using your safe.

Chubb safes

