


EagleSafes




Model YES

Notes on safety


1. Due to security reasons change the factory code of 1 2 3 4 5 6 immediately.
2. For your new code, do not use any personal data like birthday or any other data, which code we know by knowledge of your person.
3. Simple codes that can be guessed easily i.e. 1 2 3 4 5 6 must not be used.
4. Your code has to be secret.
5. Don't write down your code.
6. Don't save your code on your PC, a DVD, a USB-stick or your mobile.
7. Change your code frequently for example every three months.
8. After entering the new code, the electronic lock should be opened and locked several times with the safe door opened.
9. After each locking double check if the safe is locked.




Safe Body




Drawer

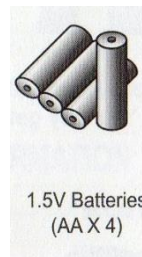

1.5V Batteries
(AA X 4)

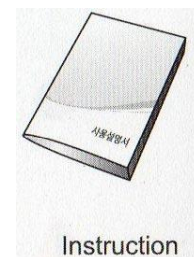

Instruction

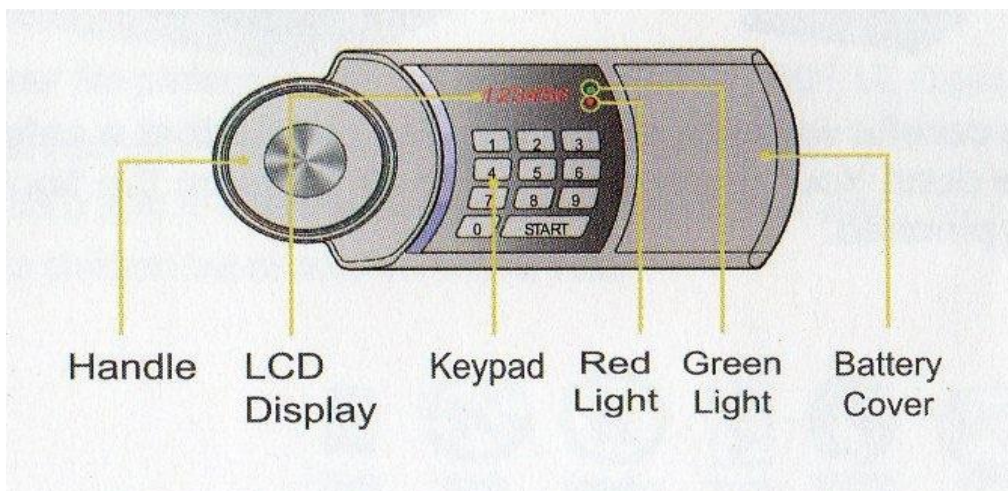

OPENING

1. Press “Start”
2. Enter your 6-digit code. (Factory Code 1 2 3 4 5 6)
3. Turn the handle within 3 seconds into opening position.

Locking

1. Close the door at the safes.
2. Turn the handle into locking position.

Changing the Code (Always check new code at least three time before closing the door)

1. Press the memory button for password change (behind the window) until the red LEDs flash permanently.
2. Enter your user 1 or 2 (1 mean user 1) (2 mean user 2) and press “START”
3. Enter your new 6-digit code and press “START”
4. LCD display will show “In 1” for user 1. And show “In 2” for user 2
5. Password has been successfully.

Lock keypad

1. Press hold “Start” 5 sec.
2. Display will be show “lock”

Active keypad

1. Press hold “Start” 5 sec
2. Display will be Show “Act”

**** Model YES-031D has a master key** How to use please contract us.**

****If you have any problem with code please contract us. ****

02-9617176